

553, 233

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
14 April 2005 (14.04.2005)


PCT

(10) International Publication Number
WO 2005/034115 A1

- (51) International Patent Classification⁷: **G11B 17/04** [KR/KR]; 301 (188-11) Jamshil-dong, Songpa-gu, Seoul 138-220 (KR).
- (21) International Application Number: **PCT/KR2004/002520**
- (22) International Filing Date: 1 October 2004 (01.10.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
10-2003-0069725 7 October 2003 (07.10.2003) KR
- (71) Applicant (for all designated States except US): **SAM-SUNG ELECTRONICS CO., LTD.** [KR/KR]; 416, Maetan-dong, Yeongtong-gu, Suwon-si, Gyeonggi-do 442-742 (KR).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **KIM, Joung-Hoon**
- (74) Agent: **LEE, Young-Pil**; The Cheonghwa Building, 1571-18, Seocho-dong, Seocho-gu, Seoul 137-874 (KR).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

[Continued on next page]

(54) Title: METHOD OF OPENING TRAY OF OPTICAL DISC CHANGER AND METHOD OF REPRODUCING DATA RECORDED ON DISC

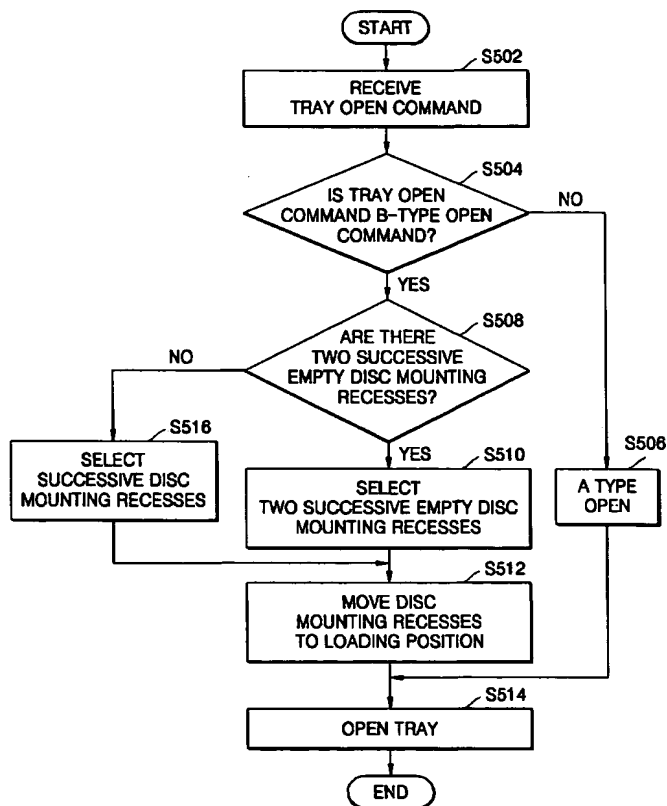

(57) Abstract: In a conventional optical disc changer, disc are loaded one at a time, so loading a pair of discs (disc A and disc B) requires two loading processes. Also, when reproduction of data on disc A is completed, the user generally has to manipulate controls of the conventional optical disc changer to begin reproduction of data on disc B. Provided are a method of opening a tray of an optical disc changer, which enables two discs to be loaded simultaneously, and a method of reproducing data on discs in the optical disc changer. The method of opening a tray of an optical disc changer includes moving two disc mounting recesses to a position where they will be exposed so that discs can be mounted on them when the tray is opened, when a tray open command for mounting two discs simultaneously is input by a user; and then opening the tray.

WO 2005/034115 A1



FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*